


# SCC-MPPT Solar Charge Controller



- Intelligent Maximum Power Point Tracking technology
- Built-in DSP controller with high performance
- Automatic battery voltage detection
- Three-stage charging optimizes battery performance
- Auto load-detection
- Multifunction LCD displays detailed information
- Reverse polarity protection for solar panel and battery
- Overcharge and overload protection
- IP 43 protection for outdoor and harsh environment
- Suitable for battery types: sealed lead acid, vented, Gel, and NiCd

## Standalone Solar Power System:

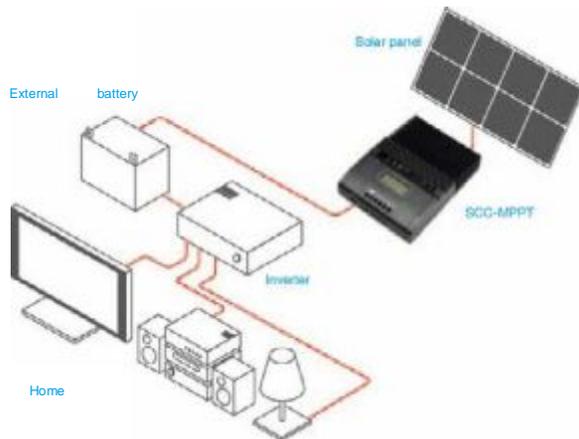

Combined MPPT technology and DSP controller, SCC-MPPT will convert best voltage to charge battery based on varied temperature. Compared to traditional solar charge controller, it allows your solar panels to operate at their optimum power output voltage, providing higher efficiency up to 98% with lower power loss.

Integrated SCC-MPPT with inverter, solar panel, and external battery packs, it will become a standalone solar power system to generate green power for your home appliances. SCC-MPPT will convert solar power to charge external batteries, and then provide power to home appliances via inverter.

## SCC-MPPT Solar Charge Controller Selection Guide

MODEL	SCC-MPPT 300W	SCC-MPPT 600W
<b>INPUT</b>		
MPPT Range @ Operating Voltage	15 V ~ as V @ 12 V	3U V ~ 66 V @ 24 V
Maximum PV Array Open Circuit Voltage	5U V	75 V
Maximum PV Array Power	3UU W	6UU W
Maximum Current	1B A	
<b>OUTPUT</b>		
Nominal Battery Voltage	12 V	24 V
Connected Battery Type	Sealed lead acid, vented, Gel, NiCd battery	
Maximum Charging Current	25 A	
Maximum Efficiency	98%	
Standby Power Consumption	1 W	2 W
Charging Method	Three stages: bulk, absorption, and floating	
<b>PROTECTION</b>		
Overload Protection	> 110% : audible alarm	
Overcharge Protection	Yes	
Polarity Reversal Protection @ Solar Cell & Battery	Yes	
<b>INDICATORS</b>		
LCD Panel	LCD panel Indicating solar power, load level, battery voltage/capacity, charging current, and fault conditions	
LED Display	Three indicators for solar, charging, and load status	
<b>PHYSICAL</b>		
Dimension, D x W x H (mm)	135 x 17U x 57.5	22U x 17U x 57.5
Net Weight (Kgs)	U.92	1.B5
Connector	Input/Output terminal block	
Type of Mechanical Protection	IP 43	
<b>ENVIRONMENT</b>		
Humidity	0 ~ 100% RH (No condensing)	
Operating Temperature	-20°C to 55°C	
Storage Temperature	-40°C to 75°C	
Altitude	0 ~3000 m	

Product specifications are subject to change without further notice