

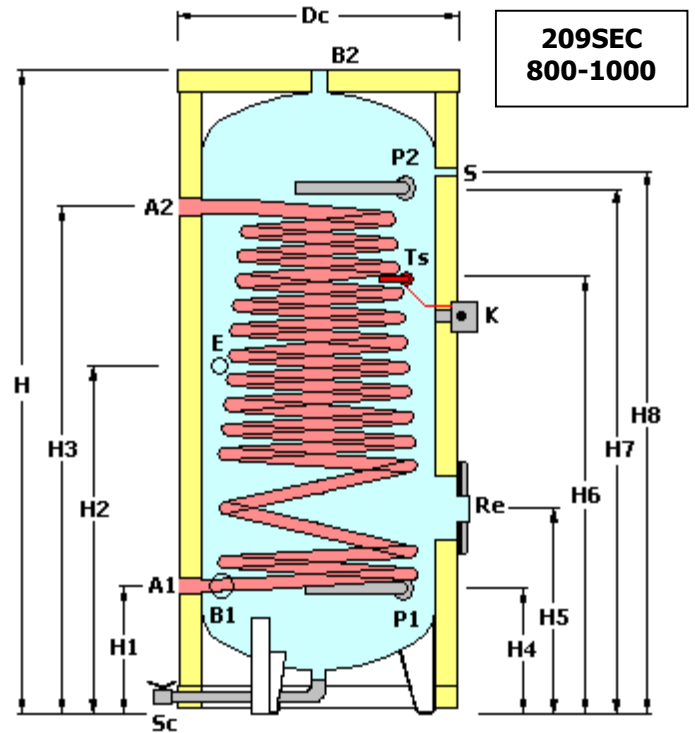


8. DRAWING.

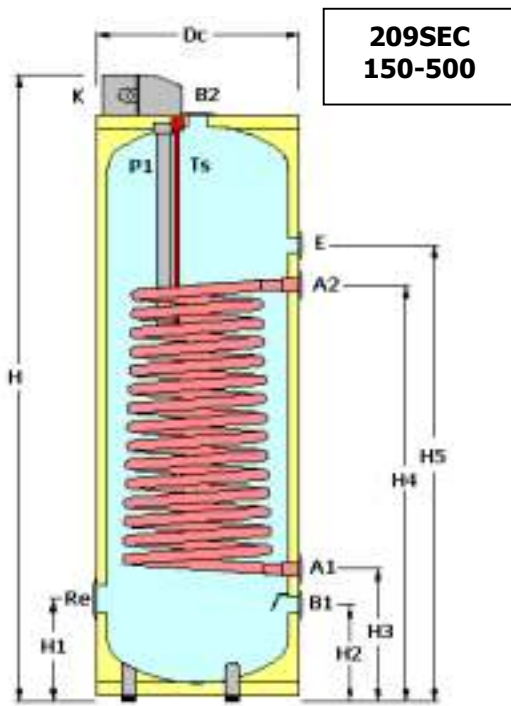

- A1-A2** = PRIMARY OUTLET-INLET
- B1-B2** = SANITARY WATER OUTLET-INLET
- SC** = OUTLET VALVE 1"
- Re** = ELECTRIC ELEMENT CONECTION 2"
- E** = AUXILIARY CONNECTION 1"
- S** = PROBE CONNECTION 1/2"
- P1-P2** = ANODE 1"1/4
- K** = CONTROL PANEL
- Ts** = TEMPERATURE PROBE

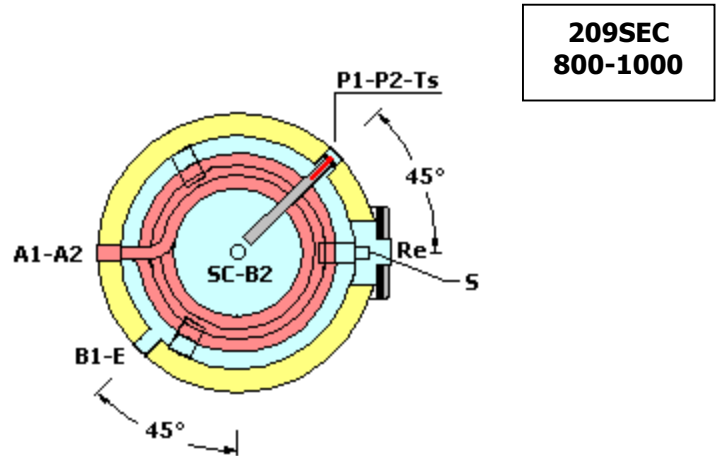

Mod.	Dc (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	H5 (mm)	A1 A2	B1	B2	Re	length anode P1 (mm)
150	500	1260	255	240	330	845	950	3/4"	1"	1" 1/4	2"	500
200	500	1560	255	240	330	1035	1135	3/4"	1"	1" 1/4	2"	500
300	600	1480	255	240	330	1035	1135	3/4"	1"	1" 1/4	2"	900
400	700	1550	300	285	375	975	1075	1"	1"	1" 1/4	2"	900
500	700	1800	300	285	375	1090	1190	1"	1"	1" 1/4	2"	900

Mod.	Dc (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	H5 (mm)	H6 (mm)	H7 (mm)	H8 (mm)	A1 A2	B1 B2	Re	length anode P1 - P2 (mm)
800	930	1940	430	1170	1460	420	690	1250	1520	1580	1" 1/2	1" 1/4	2" 1/2	500
1000	930	2190	430	1170	1710	420	690	1500	1770	1830	1" 1/2	1" 1/4	2" 1/2	500